



2D LED BULK HEAD


Model No	Power	Input	Lumens	Protection Rating	Microwave Sensor	Emergency Battery Back-Up
VT-15	15W	AC200-240V 50/60 Hz	1200LM	IP65	NO	NO
VT-16					YES	NO
VT-17					NO	YES
VT-19					YES	YES



INSTALLATION INSTRUCTIONS


STEP 1

Remove the cover by twisting the diffuser anti-clockwise and set aside. Carefully remove the LED tray and unplug it from the LED driver, and set aside

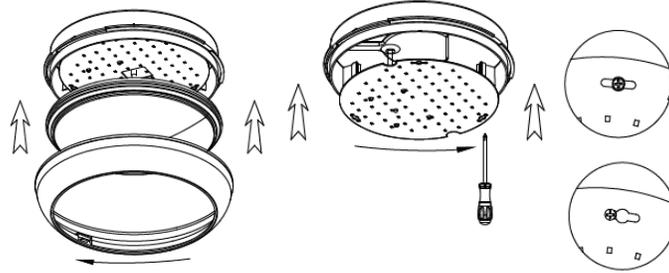


STEP 2

Hold the product in place, mark & drill the holes into the wall and nail the alligator into the hole.




STEP 3

Make the AC Power connection through the waterproof rubber cap.




STEP 4


Install the LED tray and diffuser back and switch on.

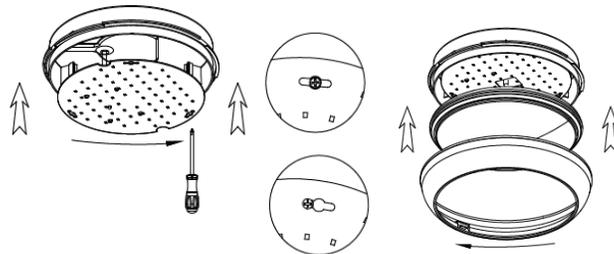


SENSOR WIRING DIAGRAM

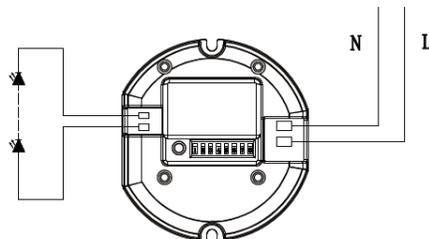

SENSOR SETTINGS

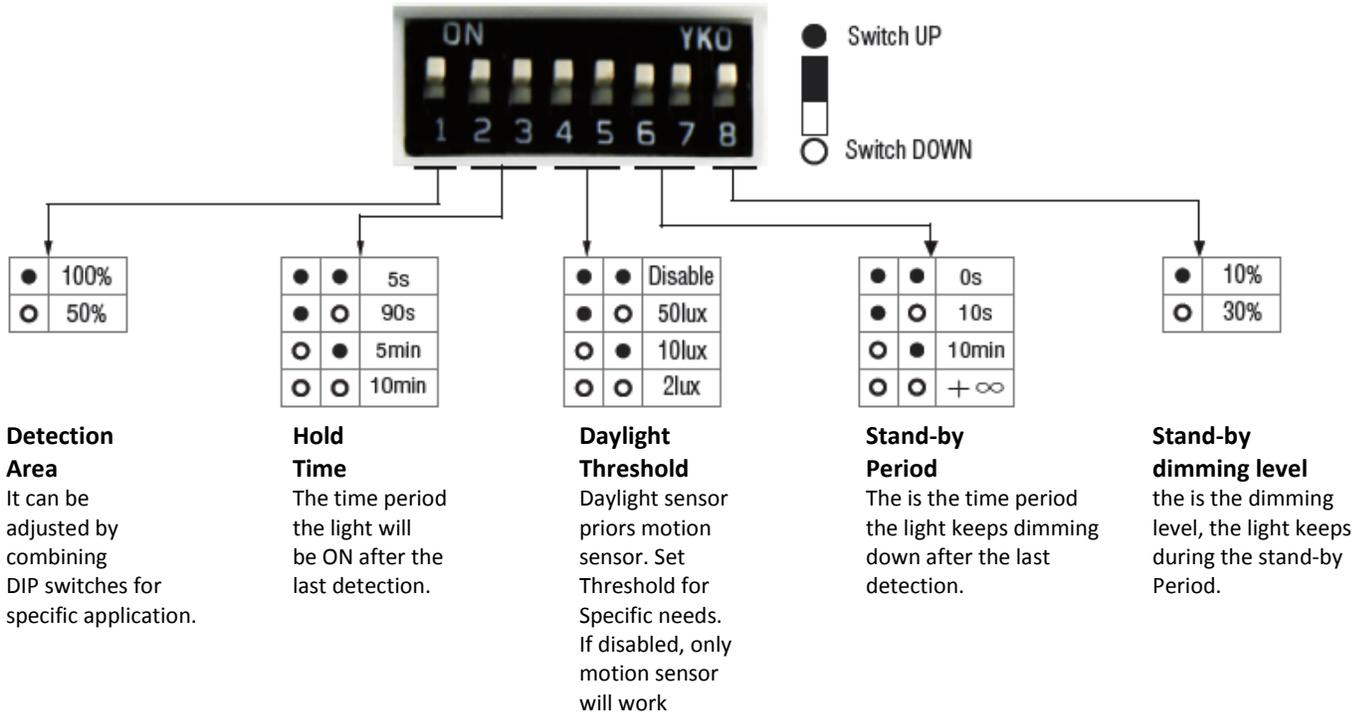

APPLICATION (Function Demo – Dimmable Control/Corridor function)

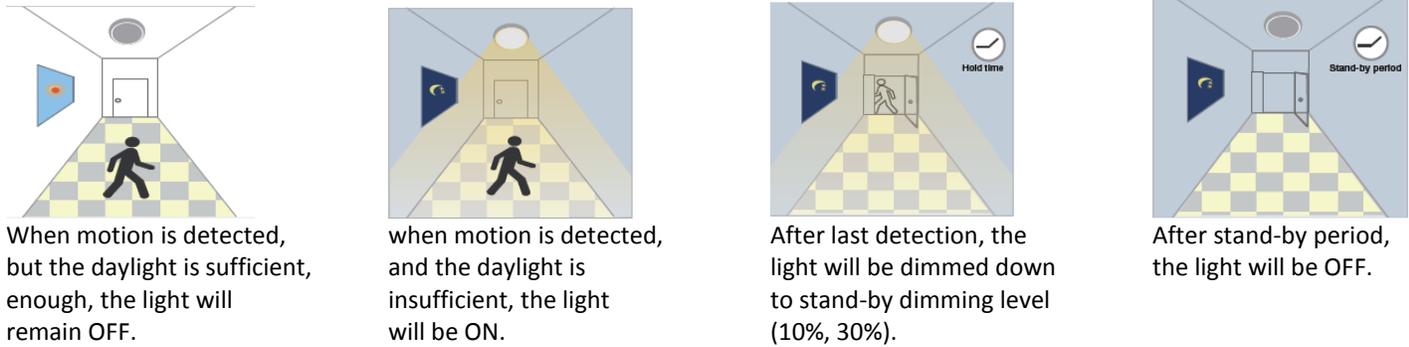


SPECIFICATION FOR EMERGENCY FUNCTION

Battery Type	Ni-CD
Battery Charging	60 mA, 90% in 24 hours.
Discharging	200 mA, >3 hours autonomy time.
Test Button	With
Charging Indicate	Green Light

Pre-Install Emergency function test.

- Connect the AC cable according to the below diagram

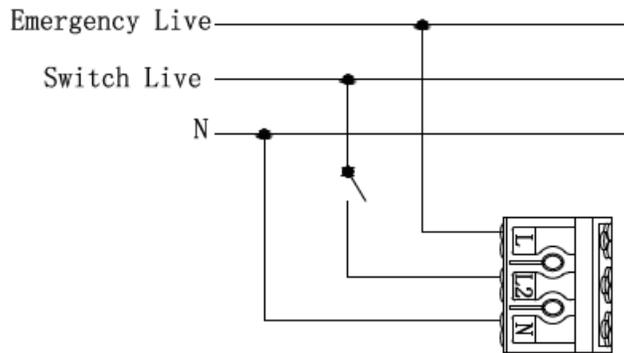

- Press the test button on the driver. The emergency function will be activated, and the charging indication will be off.
- Disconnect the battery pack, the charging indicated LED off.

NOTE: After installation, allow 36 hours to ensure full battery charge and then interrupt the supply.

In case of any query/issue with the product, please reach to us at support@v-tac.eu

For more product range, kindly contact our nearest dealer or distributor.

V-TAC Europe LTD, Bulgaria, Plovdiv 4000, bul. L. Karavelow 9B.
