



Meaningful Innovation.

INSTRUCTION MANUAL


LED WATERPROOF LAMP

IP65
RATING

3 IN 1
CCT



02 YEAR
WARRANTY*



TECHNICAL DATA

MODEL	SKU	WATTS	LUMEN @SPHERE360°	BEAM ANGLE	DF	CRI	INPUT VOLTAGE	LIFE SPAN [Hours]	ON/OFF CYCLE	MAX CONNECTABLE UNITS	DIMENSION	MATERIAL	IK RATING
VT-1249CCT	24422	36W	4320Lm	120°	≥0.9	≥80	AC: 220-240 50/60Hz	20,000	10000	8	1176x66x58mm	PC	IK05
VT-1574CCT	24421	48W	5760Lm	120°	≥0.9	≥80	AC: 220-240 50/60Hz	20,000	10000	6	1476x66x58mm	PC	IK05

INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a qualified electrician.
3. The light source of this luminaire is not replaceable; when the light source reaches its end of life the whole luminaire shall be replaced.
4. If the external flexible cable or cord of this luminaire is damaged, it shall be exclusively replaced by the manufacturer or his service agent or a similar qualified person in order to avoid a hazard.
5. Terminal block not included. To be connected with Waterproof Cable Hose
6. For indoor use and outdoor use.



MULTI-LANGUAGE MANUAL QR CODE

Please scan the QR code to access the manual in multiple languages.



FR

Cet appareil,
ses accessoires
et cordons
se recyclent

À DÉPOSER
EN MAGASIN



ou


À DÉPOSER
EN DÉCHÈTERIE



Points de collecte sur www.quefairedemesdechets.fr
Privilégiez la réparation ou le don de votre appareil !




This marking indicates that this product should not be disposed of with other household wastes.




Caution, risk of electric shock.

INSTALLATION INSTRUCTION

1. Turn off the power before starting the installation.
2. Secure the two mounting clips firmly to the installation surface.
3. Loosen the screw and remove the end cap. (Open the CCT end cap to adjust the color temperature using the CCT DIP switch.)
4. Connect the luminaire to the power supply.
5. Reinstall and secure the end cap.
6. Mount the luminaire onto the installed mounting clips.
7. Turn on the power and test the lamp.









Non-replaceable control gear



Non-replaceable light source


INSTALLATION DIAGRAM

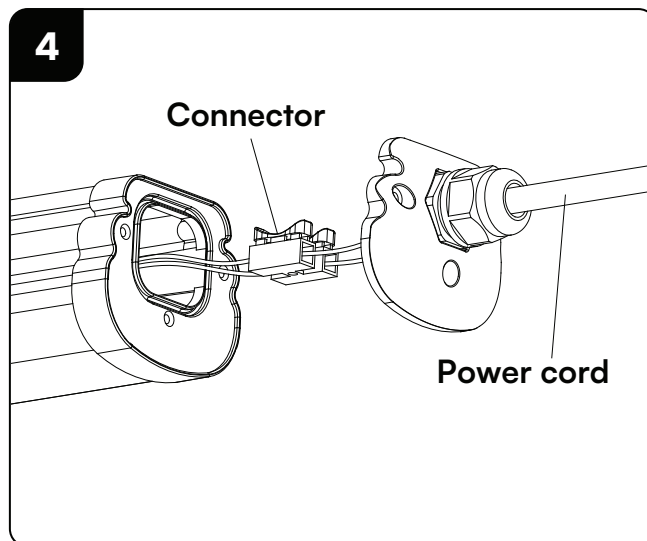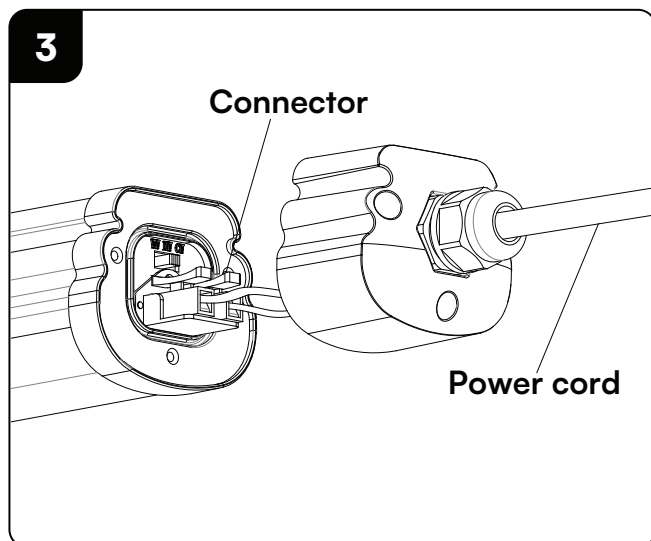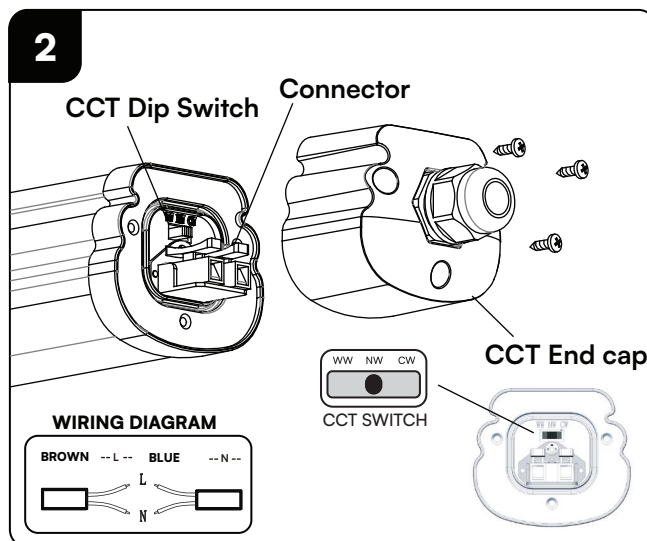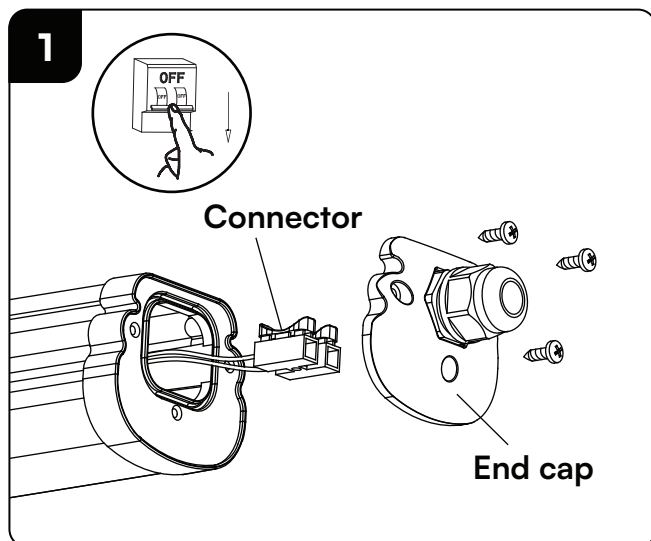

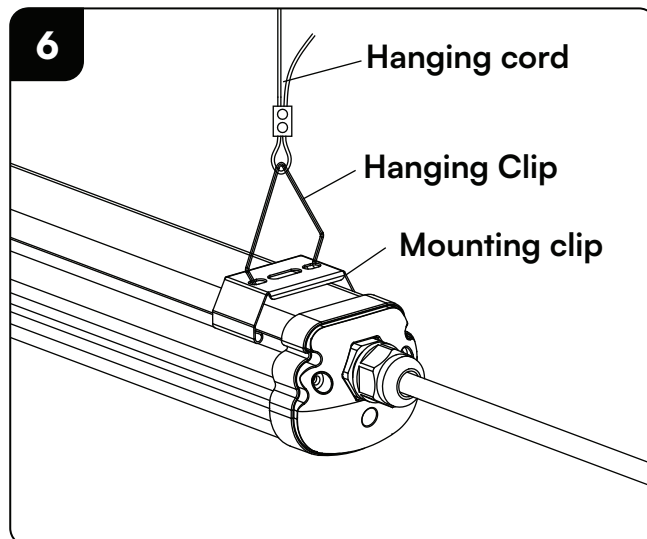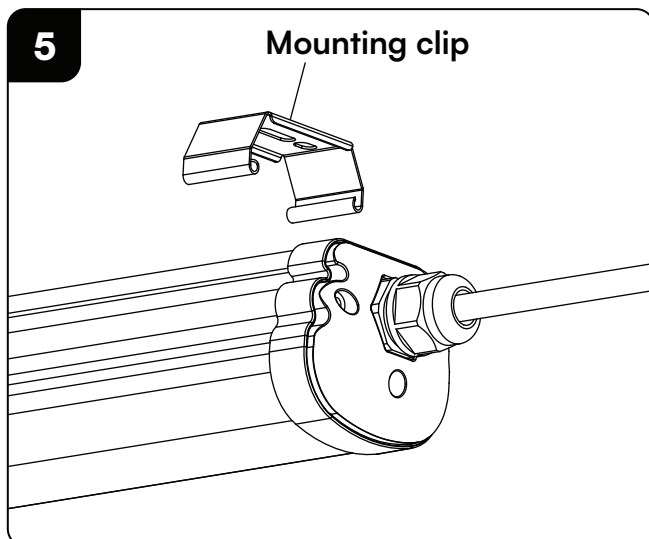

Note: Supply connection and other external wiring conductor shall be at least 1.0 mm² and confirm to EN 50525.

LINKABLE CONNECTION

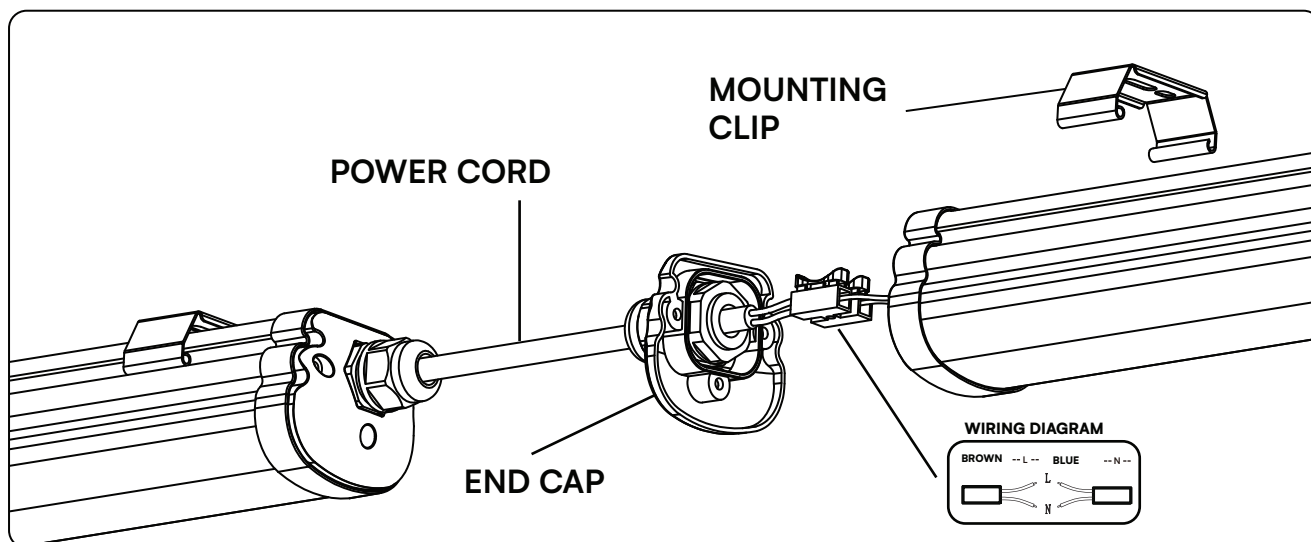

V-TAC WEST EUROPE LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT:
 SUPPORT@V-TAC.EU FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS.
 V-TAC WEST EUROPE LTD. GROUND FLOOR, 71 LOWER BAGGOT STREET, DUBLIN 02, IRELAND DO2 P593

V-TAC UK LTD. IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT PLEASE REACH OUT TO US AT
 SUPPORT@VTACEXPORTS.COM V-TAC, 5A TUNGSTEN PARK, DOWNS ROAD, WITNEY, OXFORDSHIRE, OX29 OAX