

## INSTALLATION INSTRUCTION

### INFRARED CONTROLLER



#### TECHNICAL DATA:

Model	VT-2428
Output	5 Channels
Output Current	≤10A
Output Power	120V/240W
Supply Voltage	DC: 12V/24V

#### INTRODUCTION & WARRANTY

Thank you for selecting and buying V-TAC product. V-TAC will serve you the best. Please read these instructions carefully before starting the installation and keep this manual handy for future reference. If you have any another query, please contact our dealer or local vendor from whom you have purchased the product. They are trained and ready to serve you at the best. The warranty is valid for 2 years from the date of purchase. The warranty does not apply to damage caused by incorrect installation or abnormal wear and tear. The company gives no warranty against damage to any surface due to incorrect removal and installation of the product. The products are suitable for 10-12 Hours Daily operation. Usage of product for 24 Hours a day would void the warranty. This product is warranted for manufacturing defects only.

#### WARNING

1. Please make sure to turn off the power before starting the installation.
2. Installation must be performed by a certified person.



This marking indicates that this product should not be disposed of with other household wastes.



Caution, risk of electric shock.



#### MULTI-LANGUAGE MANUAL QR CODE


Please scan the QR code to access the manual in multiple languages.

#### KEY FUNCTIONS ARE AS FOLLOWS :

Color temperature brightness+	Color temperature brightness+-	<b>white</b>	Warm colors
Static brightness+ Dynamic speed +	Static brightness - Dynamic speed -	Turn off	Turn on
Static red	Static green	Static blue	white (RGB Combination)
Static rose	Static dark green	Static Sapphire blue	7 colors jump changing
Static orange	Static Turquoise blue	Static purple gray	7 colors breath changing
Static goose yellow	Static sky blue	Static dark reddish purple	7 color fade changing
Static yellow	Static cyan	Static purple	Twinkle Flash

#### CONNECTION DIAGRAM:

Note: Connect the load first and then the power on; Ensure that there is no short circuit between wires connection before power on

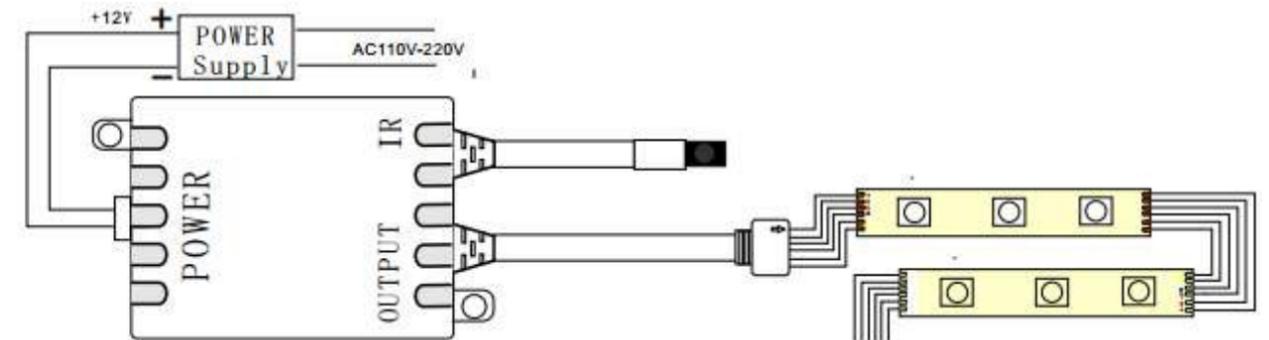

#### NOTES:

1. The power supply voltage of this product is DC12-24V and shall not be connected to other voltages.
2. The outgoing line shall be correctly wired according to the color and label provided in the wiring diagram.
3. This product should not be overloaded.

IN CASE OF ANY QUERY/ISSUE WITH THE PRODUCT, PLEASE REACH OUT TO US AT: [SUPPORT@V-TAC.EU](mailto:SUPPORT@V-TAC.EU)  
FOR MORE PRODUCTS RANGE, INQUIRY PLEASE CONTACT OUR DISTRIBUTOR OR NEAREST DEALERS. V-TAC EUROPE LTD. BULGARIA, PLOVDIV 4000, BUL.L.KARAVELOW 9B