


Installation



- ① Hole
- ② Expansion Plug
- ③ Screw
- ④ Mounting Hole
- ⑤ Button



1. Pls use the card to measure hole position correctly and drill 2 holes.
2. Fix 2 expansion plugs into the holes.
3. Fix a screw to the lower expansion plug with a spare space, insert the notch onto the screw.
4. Straighten the whole lamp and fasten the upper screw.
5. Press the button to adjust to demanded working mode.

Notice

1. Pls install this light onto flat surface directionally to get enough solar.
2. The lamp will light up when the environmental brightness is less than 30lux.
3. Inside battery is replaceable, 18650 Li-ion battery, 1200mAh/3.7V.
4. Lamp need to be installed 2-4Mtr from the ground.

V-TAC[®]

INNOVATIVE LED LIGHTING

INSTRUCTION MANUAL



can do more than the sun



Model: VT-767-2

Please read and follow all instructions to operate.
Save this manual for future reference.

WEEE Number:80133970

Specification

SKU	8276/8277
Power/Lumen	1.5 W / 220LM
LEDs	SMD2835*14PCS
Li-ion Battery	1200mAh / 3.7V, 18650
Solar Panel	0.7Wp, Poly-crystalline silicon
Working Mode	2 different lighting modes
Detection Angle/Area	90°/ 2-6Mtr
Visible Distance	6-7Mtr
IP Degree	IP 65
Lifespan	35,000hrs
Installation Height	2-4Mtr

Features



ZERO Electricity Cost



Solar Powered



PIR Detective



Light on/off automatically




Outdoor



Cordless

Working Modes

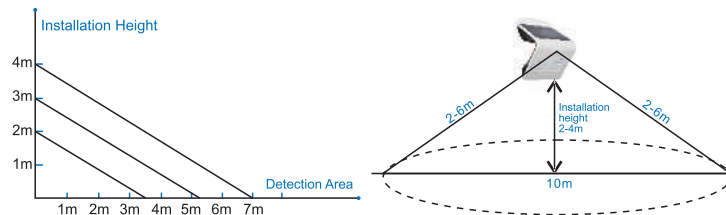

Pls press the Button to adjust working mode:

Press 1st time for Mode A.
 Press 2nd time for Mode B.
 Press 3rd time for off.



Mode A: Automatically turns on to full brightness (220lm) when motion is detected in the range ≤ 6 mtrs and then turns to weak brightness (front light on & back light on) in 10 seconds of no motion.



Mode B: Automatically turns on to full brightness (220lm) when motion is detected in the range ≤ 6 mtrs and then turns to weak brightness (front light off & back light on) in 10 seconds of no motion.